


SPOTLIGHT 30 LED RGB IP68

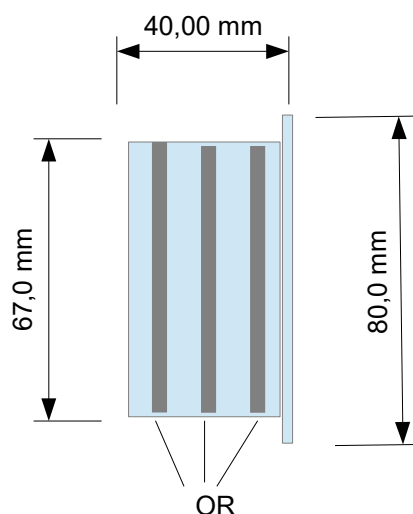

Spot Led in acciaio Aisi 316 resinato IP68.
Resistente all'acqua anche clorata o salata,
e alle alte temperature.
Adatto per piscine, docce, saune, fontane

*Led Spotlight in stainless steel Aisi 316.
IP68 resin, water resistance, chlorine and salt water
too, as well as high temperature.
Suitable for pools, showers, saunas, fountains.*



RGB

Potenza / Power:	3,84 W on white
no. Led / Led Amount:	30
Temp. Color:	RGB
Lumen:	400 lm on white
Angolo / Beam Angle:	120°
Materiale / Material:	FR-4
Temp. Lavoro / Working temp:	-20° + 80°
Vita utile / Life:	80.000 h
Volts:	12 Vdc

Corpo / Body: Acciaio / Stainless Steel AISI 316
Vetrino: Polimetilmetacrilato Trasparente o Opalino
Glass: Polimetacrilate Transparent or Opalin
Resina / Resin: Poliuretana / Polyurethane resin (PUR)
Pressacavo / Gland: plastica / plastic IP68
Cavo / Cable: Olfelx Robust
Optional: rivestimento con pellicole colorate ad alta resistenza
Optional: wrapping with premium quality coloured film
Installazione: tubo PVC diam. 75 PN10
Installation: PVC pipe diam 75 PN10



SPOTLIGHT 30 LED WHITE IP68

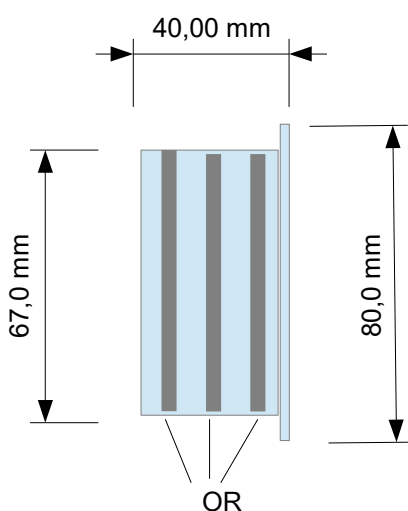

Spot Led in acciaio Aisi 316 resinato IP68.
Resistente all'acqua anche clorata o salata,
e alle alte temperature.
Adatto per piscine, docce, saune, fontane

*Led Spotlight in stainless steel Aisi 316.
IP68 resin, water resistance, chlorine and salt
water too, as well as high temperature.
Suitable for pools, showers, saunas, fountains.*

Bianco / White

Potenza / Power:	2,9 W
no. Led / Led Amount:	30
CRI:	Min 90
Temp. Color:	2500K – 5000K
Lumen:	600 lm
Angolo / Beam Angle:	120°
Materiale / Material:	FR-4
Temp. Lavoro / Working temp:	-20° + 80°
Vita utile / Life:	80.000 h
Volts:	12 Vdc

Corpo / Body: Acciaio / Stainless Steel AISI 316
Vetrino: Polimetilmetacrilato Trasparente o Opalino
Glass: Polimetacrilate Transparent or Opalin
Resina / Resin: Poliuretana / Polyurethane resin (PUR)
Pressacavo / Gland: plastica / plastic IP68
Cavo / Cable: Olfelx Robust
Optional: rivestimento con pellicole colorate ad alta resistenza
Optional: wrapping with premium quality coloured film
Installazione: tubo PVC diam. 75 PN10
Installation: PVC pipe diam 75 PN10

